INNOVATIVE DESIGN, EFFICIENT PERFORMANCE AND QUALITY BUILD

All over the world the name Elica is synonymous with efficiency, innovation and design in the production of cooker hoods.

Beautiful, distinctive and stylish design is the unifying element and core philosophy for our entire range of cooker-hoods. Universally acclaimed for their radically innovative appearance, our products are far more than simple hoods for domestic kitchens: they are key personalities that define the room in which they are installed.

Elica no longer design hoods: we design the air itself.

ELICA

Elica range defines itself with models of extraordinary elegance and effortless efficiency.
No other manufacturer combines such an inspired choice of materials with our unparalleled dedication to design and quality. To allow your imagination free reign, our Elica range has been carefully assembled with the broadest choice of possibilities for the contemporary kitchen.

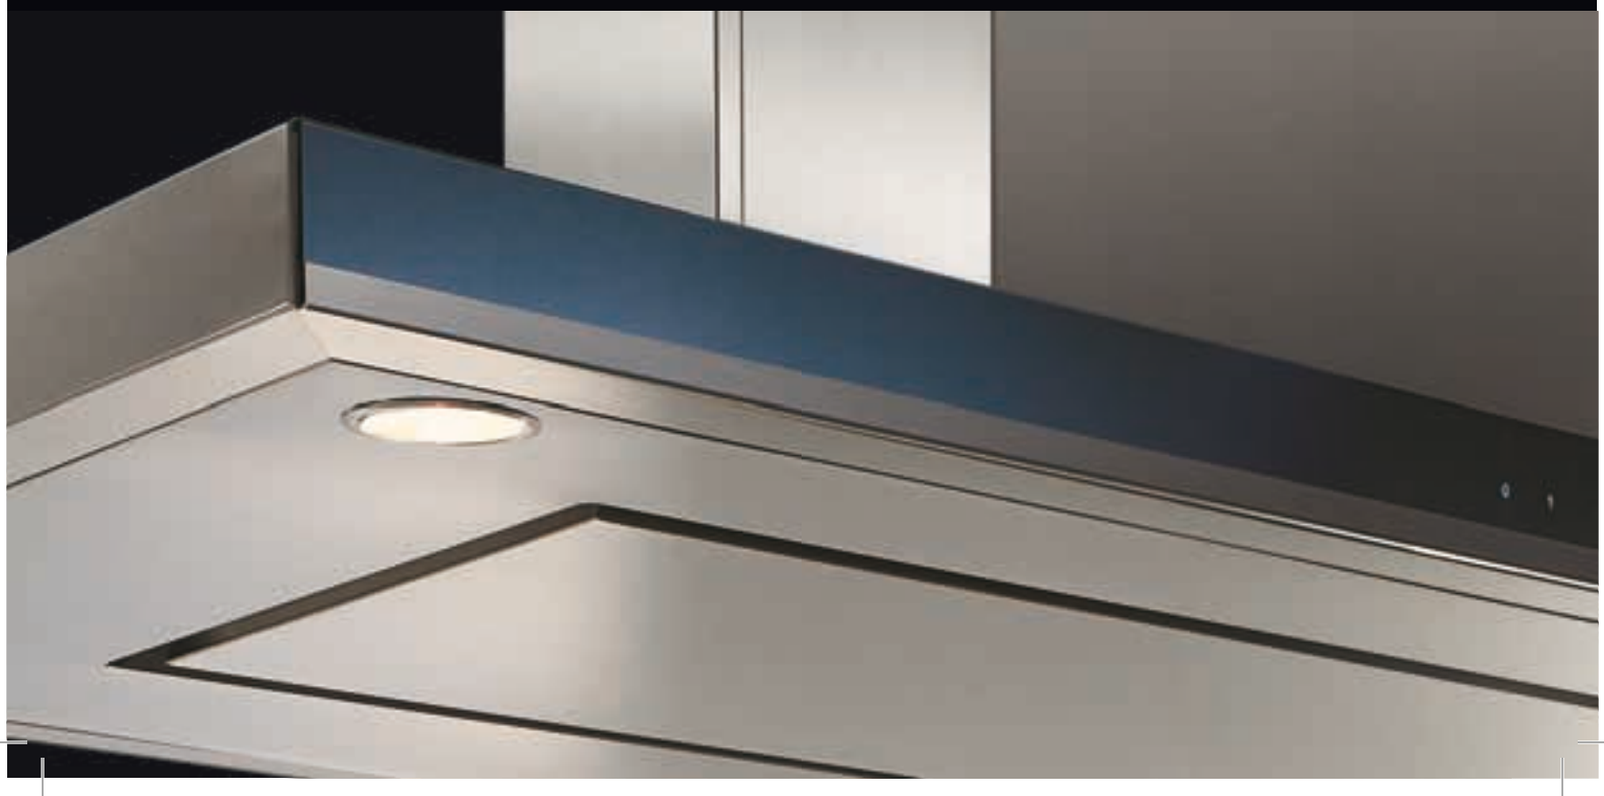

Index

ISLAND

6 CHROME

7 JASMINE

8 ROSE SOPHIE

9 JULIETTE BRIGITTE

10 MERIDIANA

11 NAKED

12 ANTARTICA

CHIMNEY / DECORATIVE

22 HORIZONTE



23 TENDER

24 STONE GALLERY

25 ROCK

26 CANDLE

27 ARTICA

28 FUTURA

36 CUBE

37 STONE

38 STENAR

39 FOCUS

40 SPOT

41 TAMAYA

42 TUSCAN

CLASSIC / CANOPY / INTEGRATED

49 ELIPER



50 GLIDE

50 ELIPLANE

51 ELIBLOC 9

52 ELIBLOC HT

52 ELISLIM



53 CONCORDE

13 ATLANTICA

14 QUAD

15 RING

16 CUBICA

17 ICEBERG

18 FREE SPOT

19 GLACIER ISLAND

29 ATLANTIS

30 BOGART

31 OPTICA

32 PLAZA

33 GLACIER

34 IGLOO

35 SAMURAI



43 KEY

44 TONDA



45 AQUA

46 HYDRA

47 PERSONAL

53 INTEGRATA NG

ISLAND

6 CHROME

7 JASMINE

8 ROSE

8 SOPHIE

12 ANTARTICA

13 ATLANTICA

14 QUAD

15 RING

9

JULIETTE

9

BRIGITTE



10

MERIDIANA

11

NAKED

16

CUBICA

17

ICEBERG

18

FREE SPOT

19

GLACIER ISLAND

Chrome

ISLAND

NEW

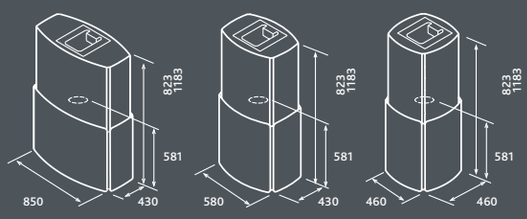

Finish	Shiny Stainless Steel
Controls	3 speed illuminated 'Magic Wand' touch
Lights	sensor + boost 2x20W - 4x20W(850mm) halogen lamps
Grease filter	EDS3 Professional filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	850x430-580x430-460x460mm
Maximum airflow	900 m³/h
IEC airflow	820 m³/h
Noise level	35-56 dB(A)
Power consumption	260w-300w
Charcoal Filter	KIT01916

	Description	Code
CHROME 46	CHROME EDS IX/A/46	69315812
CHROME 58	CHROME EDS IX/A/58	69315976
CHROME 85	CHROME EDS IX/A/85	69315977
KIT REMOTE CONTROL	KIT REMOTE CONTROL	KIT02183

Jasmine

ISLAND

NEW



Finish	Pearl, Violet
Controls	3 speed illuminated soft push buttons
Lights	2x20w halogen lamps + 4X40w lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5”) diameter ducting connector
Available widths	500x500 mm
Maximum airflow	500 m^3/h
IEC airflow	460 m^3/h
Noise level	46-64 dB(A)
Power consumption	370w
Charcoal Filter	F00264/1S

	Description	Code
JASMINE PEARL	Jasmine Pearl F/50	71716351
JASMINE VIOLET	Jasmine Violet F/50	71716350

Rose

ISLAND

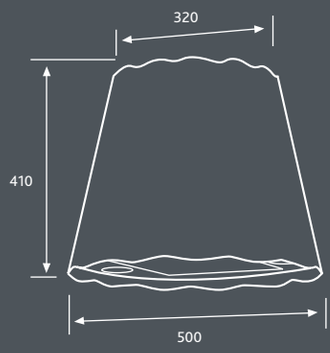

	Description	Code
ROSE PEARL	Rose Pearl F/50	71716353
ROSE SUNSET	Rose Sunset F/50	71716352

Finish	Pearl, Orange
Controls	3 speed illuminated soft push buttons
Lights	2x20w halogen lamps + 4X40w lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5”) diameter ducting connector
Available widths	500x500 mm
Maximum airflow	500 m³/h
IEC airflow	460 m³/h
Noise level	46-64 dB(A)
Power consumption	370 w
Charcoal Filter	F00264/1S

Sophie

ISLAND

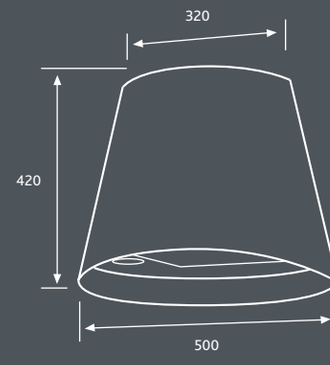

	Description	Code
SOPHIE PEARL	Sophie Pearl F/50	71716354
SOPHIE GREEN	Sophie Green F/50	71716355

Finish	Pearl, Green
Controls	3 speed illuminated soft push buttons
Lights	2x20w halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5”) diameter ducting connector
Available widths	500x500 mm
Maximum airflow	500 m³/h
IEC airflow	460 m³/h
Noise level	46-64 dB(A)
Power consumption	210 w
Charcoal Filter	F00264/1S

Juliette

ISLAND

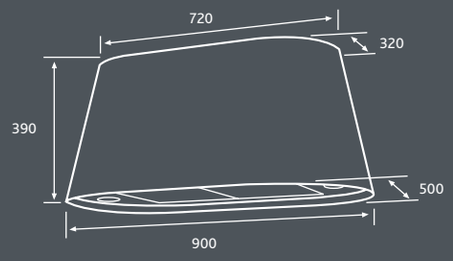

	Description	Code
JULIETTE GREEN	Juliette Green F/90	71716356
JULIETTE PEARL	Juliette Pearl F/90	71716357

Finish	Green, Pearl
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps + 6x40w lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5") diameter ducting connector
Available widths	900x500 mm
Maximum airflow	500 m³/h
IEC airflow	460 m³/h
Noise level	46-64 dB(A)
Power consumption	450 w
Charcoal Filter	F00264/1S

Brigitte

ISLAND

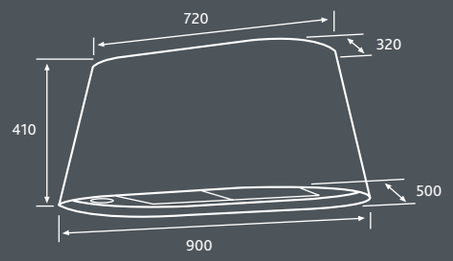

	Description	Code
BRIGITTE PEARL	Brigitte Pearl F/90	71716359
BRIGITTE VIOLET	Brigitte Violet F/90	71716358

Finish	Pearl, Violet
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5") diameter ducting connector
Available widths	900x500 mm
Maximum airflow	500 m³/h
IEC airflow	460 m³/h
Noise level	46-64 dB(A)
Power consumption	210 w
Charcoal Filter	F00264/1S

Meridiana

ISLAND

EDS3 DeepSilence

NEW

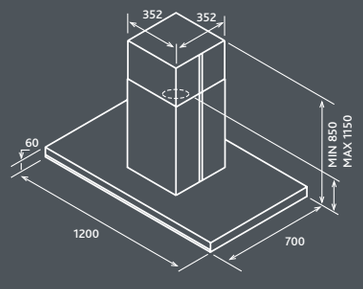

Finish	Stainless Steel + Glass
Controls	3 speed Touchscreen + boost
Lights	4x20W halogen lamps
Grease filter	EDS3 Professional filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	1200x700 mm
Maximum airflow	900 m^3/h
IEC airflow	820 m^3/h
Noise level	35-56 dB(A)
Power consumption	300w
	Perimeter aspiration
Charcoal Filter	KIT01916

	Description	Code
MERIDIANA	MERIDIANA EDS IX VT/A/120x70	69916134

Naked

ISLAND



Finish	Stainless steel
Controls	3 speed illuminated 'Magic Wand' touch sensor + boost Remote control unit available (optional)
Lights	1 x 40w halogen lamp
Grease filter	Metal washable grease filters & long-life odour filters included
Available widths	248mm diameter
Maximum airflow	500 m^3/h
Maximum airflow (Recycling)	280 m^3/h
IEC airflow	400 m^3/h
Noise level	43- 62 dB(A)
Power consumption	140w
	Ceiling mounted 'Evolution' system
Charcoal Filter	F00433

	Description	Code
NAKED	NAKED MW IX/F/25	64714985
KIT REMOTE CONTROL	KIT REMOTE CONTROL	KIT02183

Antartica

ISLAND

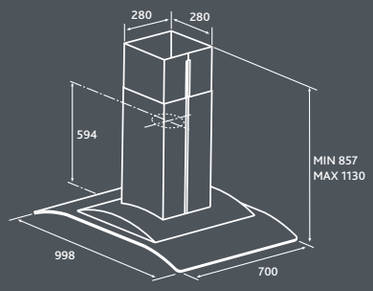

Finish	Stainless steel with curved glass
Controls	3 speed illuminated soft push buttons 3 speed electronic rotary controls + boost with filter saturation indicators (AST models only)
Lights	4 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	1000mm x 700mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	43-61 dB(A)
Power consumption	260w Optimised aspiration system Available with 1200 m^3/h external motor (RM) with 3 speed touch controls + boost (Not AST)
Charcoal Filter	F00262/2S

	Description	Code
ANTARTICA SOFT LIGHT	ANTARTICA SOFT IX/A/100x70	50916340
ANTARTICA H SOFT	ANTARTICA SOFT IX/A/100x70	50916341
ANTARTICA RM	ANTARTICA RM TC IX/A/100x70	50916342
ANTARTICA AST IX	ANTARTICA AST IX/A/100x70	50916343
ANTARTICA H AST	ANTARTICA H AST IX/A/100x70	50916344

Atlantica

ISLAND

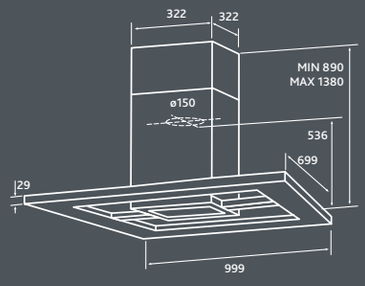

Finish	Stainless steel with glass
Controls	3 speed illuminated soft push buttons
Lights	4 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	1000mm x 700mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	43-61 dB(A)
Power consumption	260w
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
ATLANTICA	ANTLANTICA SOFT IX/A/100x70	57516346

Quad

ISLAND

NEW



Finish	Stainless Steel
Controls	6 speed Touchcontrol with filter saturation indicators
Lights	2x20W halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	430x430 mm
Maximum airflow	700 m^3/h
IEC airflow	630 m^3/h
Noise level	46-67 dB(A)
Power consumption	270 w
	Perimeter aspiration
Charcoal Filter	F00482/1S

	Description	Code
QUAD	QUAD TC IX/A/43x43	40115237

Ring

ISLAND

NEW



Finish	Stainless Steel
Controls	6 speed touch control with filter saturation indicators
Lights	2x20W halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	400x400 mm
Maximum airflow	700 m^3/h
IEC airflow	630 m^3/h
Noise level	46-67 dB(A)
Power consumption	270 w
	Perimeter aspiration
Charcoal Filter	F00482/1S

	Description	Code
RING	RING TC IX/A/40x40	40115239

Cubica

ISLAND



Finish	Stainless steel with glass trim
Controls	3 speed soft push buttons
Lights	4 x 20w halogen lamp
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	900mm x 600mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	260w
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
CUBICA	CUBICA IX/A/90x60	51613707

Iceberg

ISLAND

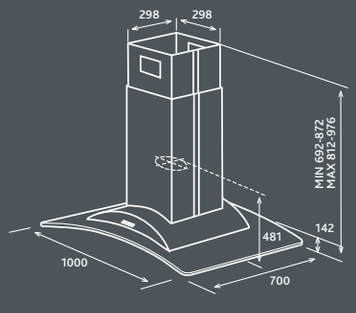

Finish	Stainless steel and curved glass
Controls	3 speed push buttons
Lights	4 x 20w halogen lamp
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	1000mm x 700mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	280w
	Available in 2 height adjustable models, SF: 692-872mm, STD: 812-976mm
	Replacement extension kit (KIT00424) also available making hood 1600mm high
Charcoal Filter	F00187/1S

	Description	Code
ICEBERG 100	ICEBERG IX/A/100x70	3816536/1
ICEBERG 100 SF	ICEBERG SF IX/A/100x70	38111800/1
CHIMNEY KIT	CHIMNEY KIT	KIT00424

Free spot

ISLAND



Finish	Stainless steel
Controls	3 speed push buttons
Lights	4 x 20w halogen lamp
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	1000mm x 600mm or 1200mm x 600mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	260w
Charcoal Filter	F00262/2S

	Description	Code
FREE SPOT 100	FREE SPOT IX/A/100x60	57312966
FREE SPOT 120	FREE SPOT IX/A/120x60	57312967

Glacier island

ISLAND

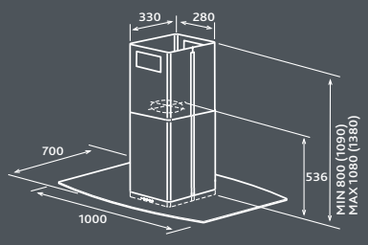

Finish	Stainless steel and glass
Controls	3 speed soft push buttons
Lights	4 x 20w halogen lamp
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	1000mm x 700mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	260w
	Optimised aspiration system
	Available with 1200 m^3/h external motor
Charcoal Filter	F00262/2S

	Description	Code
GLACIER ISLAND	GLACIER ISL IX/A/100x70	5211011/1
GLACIER ISLAND RM	GLACIER ISL RM IX/A/100x70	52111210/1

CHIMNEY / DECORATIVE

22 HORIZONTE

23 TENDER

24 STONE GALLERY

25 ROCK

26 CANDLE

32 PLAZA

33 GLACIER

34 IGLOO

35 SAMURAI

36 CUBE

42 TUSCAN

43 KEY

44 TONDA

45 AQUA

46 HYDRA

27 ARTICA

28 FUTURA

29 ATLANTIS

30 BOGART

31 OPTICA

37 STONE

38 STENAR

39 FOCUS

40 SPOT

41 TAMAYA

47 PERSONAL



Horizonte

CHIMNEY / DECORATIVE

EDS3 DeepSilence

NEW

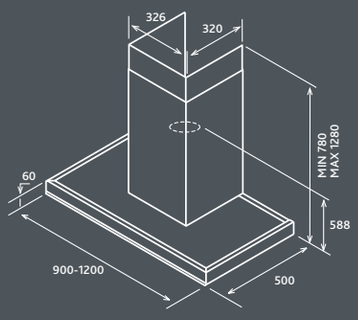

Finish	Stainless Steel + Glass
Controls	3 speed Touchscreen + boost
Lights	2x20W halogen lamps
Grease filter	EDS3 Professional filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	900mm or 1200mm
Maximum airflow	900 m³/h
IEC airflow	820 m³/h
Noise level	35-56 dB(A)
Power consumption	260w
	Perimeter aspiration
Charcoal Filter	KIT01916

	Description	Code
HORIZONTE 90	HORIZONTE EDS IX VT/A/90	69915933
HORIZONTE 120	HORIZONTE EDS IX VT/A/120	69915934

Tender

CHIMNEY / DECORATIVE

EDS3 DeepSilence

NEW



Finish	Stainless Steel
Controls	3 speed LCD + boost
Lights	2x20W halogen lamps
Grease filter	EDS3 Professional filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	700mm or 900mm
Maximum airflow	900 m³/h
IEC airflow	820 m³/h
Noise level	35-56 dB(A)
Power consumption	260w
Charcoal Filter	KIT01916

	Description	Code
TENDER 70	TENDER EDS IX/A/70	55916238
TENDER 90	TENDER EDS IX/A/90	55916232

Stone gallery

CHIMNEY / DECORATIVE

NEW

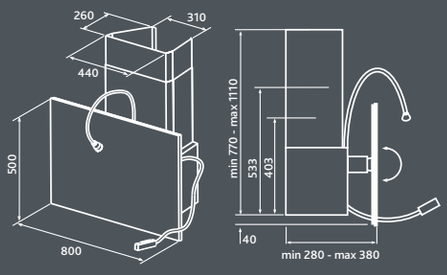

Finish	Lavagna Black - Lavagna Beige - No Stone
Controls	3 speed illuminated soft push buttons
Lights	2x20W halogen lamps + 1x2W led
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	800 mm
Maximum airflow	750 m³/h
IEC airflow	630 m³/h
Noise level	46-64 dB(A)
Power consumption	230 w
Charcoal Filter	F00262/2S

	Description	Code
STONE GALLERY	STONE GALLERY AN/A/80 (NO STONE)	61414562
STONE GALLERY BLACK	STONE GALLERY AN/A/80 (BLACK)	61414563
STONE GALLERY BEIGE	STONE GALLERY AN/A/80 (BEIGE)	61414593

Rock

CHIMNEY / DECORATIVE

NEW



Finish	Stainless Steel
Controls	6 speed touch control with filter saturation indicators
Lights	2x20W halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	430 or 600mm
Maximum airflow	700 m^3/h
IEC airflow	630 m^3/h
Noise level	46-67 dB(A)
Power consumption	270 w
	Perimeter aspiration
Charcoal Filter	F00482/1S

	Description	Code
ROCK	ROCK TC IX/A/43	40115238
ROCK	ROCK TC IX/A/60	40116376

Candle

CHIMNEY / DECORATIVE

NEW



Finish	Stainless Steel
Controls	6 speed touch control with filter saturation indicators
Lights	2x20W halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	400 mm
Maximum airflow	700 m^3/h
IEC airflow	630 m^3/h
Noise level	46-67 dB(A)
Power consumption	270 w
	Perimeter aspiration
Charcoal Filter	F00482/1S

	Description	Code
CANDLE	CANDLE TC IX/A/40	40115240

Artica

CHIMNEY / DECORATIVE

NEW

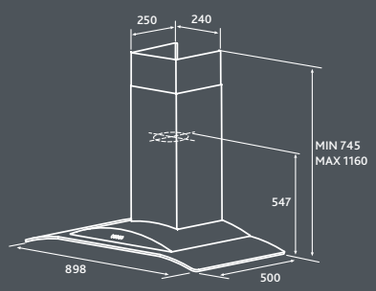

Finish	Stainless steel with curved glass
Controls	3 speed illuminated soft push buttons 3 speed electronic rotary controls + boost with filter saturation indicators (AST Models only)
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	900mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	43-61 dB(A)
Power consumption	220w Smart installation system Optimised aspiration system Available with 1200 m^3/h external motor with 3 speed touch controls + boost (Not AST)
Charcoal Filter	F00262/2S

	Description	Code
ARTICA AST	ARTICA AST IX/A/90	50816339
ARTICA SOFT LIGHT	ARTICA SOFT LIGHT IX/A/90	50816337
ARTICA RM	ARTICA GME TC IX/A/90	50816338

Futura

CHIMNEY / DECORATIVE

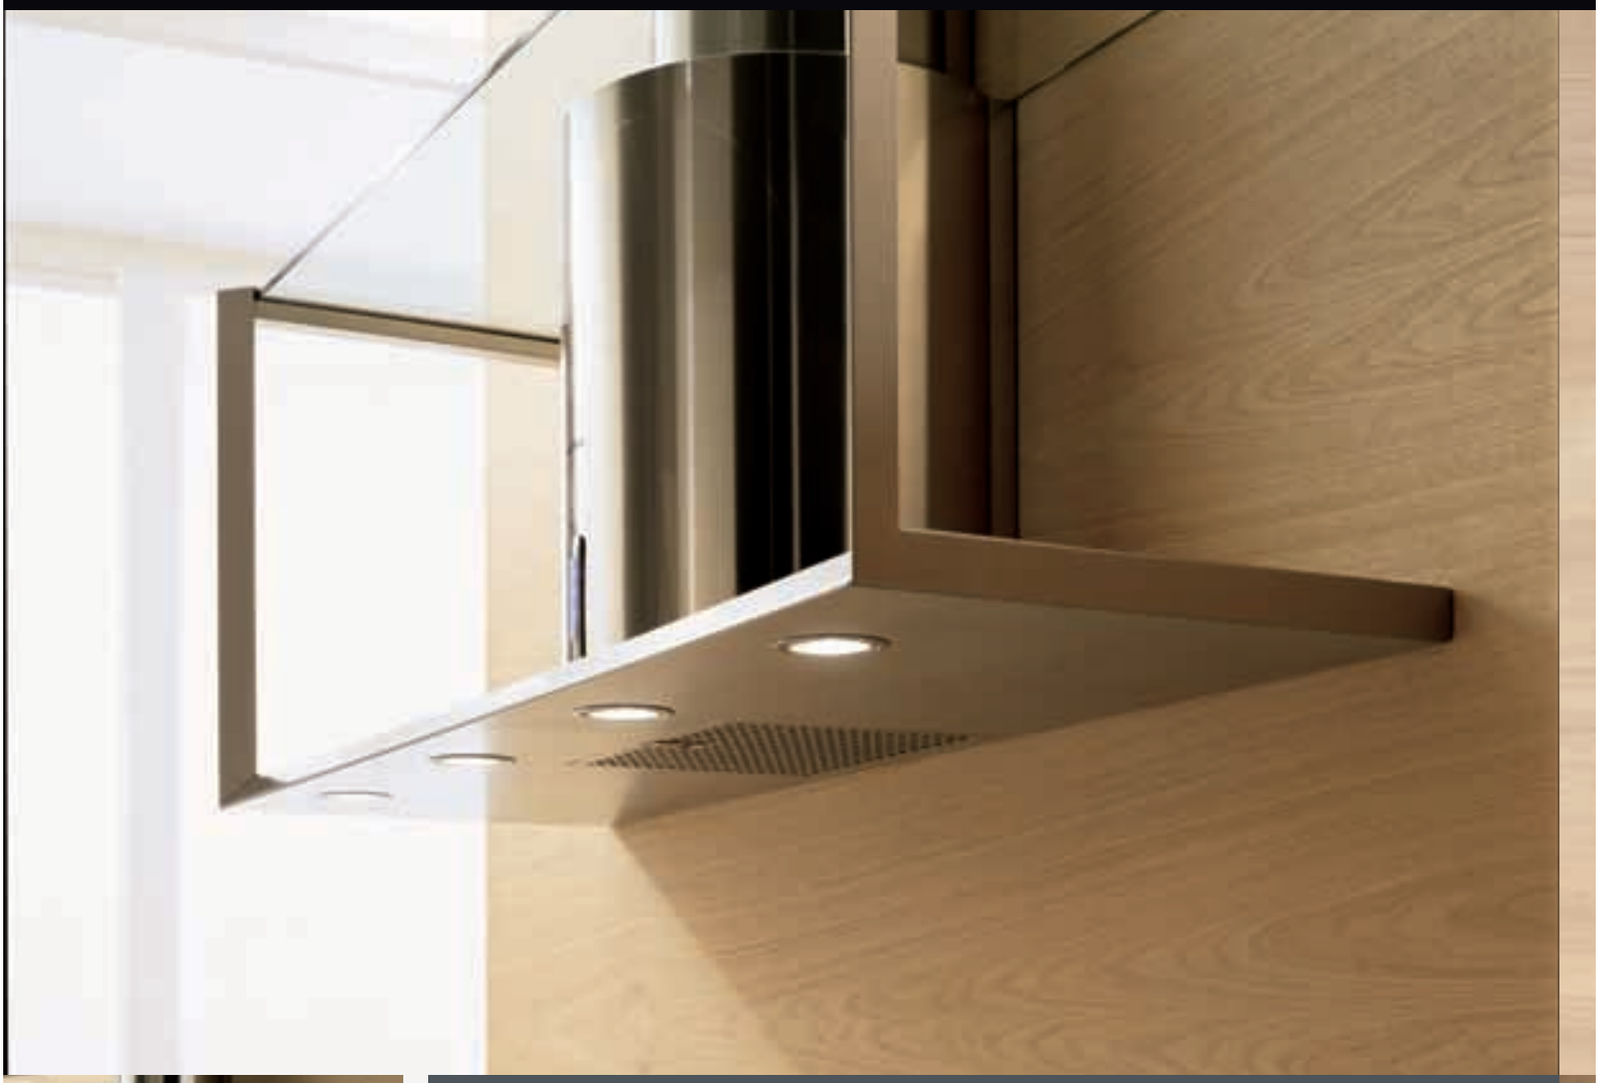

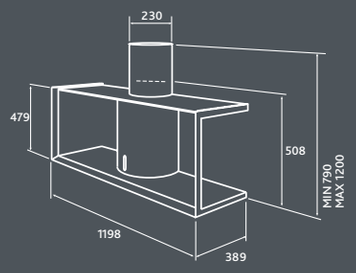

Finish	Stainless steel and glass
Controls	3 speed illuminated soft push buttons
Lights	4 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	1200mm
Maximum airflow	800 m³/h
IEC airflow	650 m³/h
Noise level	43-61 dB(A)
Power consumption	260w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
FUTURA	FUTURA SOFT IX/A/120	53616349

Atlantis

CHIMNEY / DECORATIVE

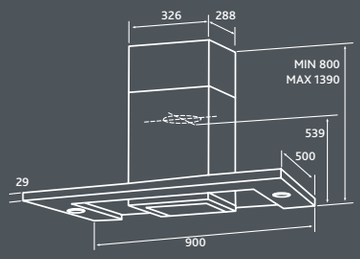

Finish	Stainless steel with glass
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	900mm
Maximum airflow	800 m³/h
IEC airflow	650 m³/h
Noise level	43-61 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
ATLANTIS SOFT	ATLANTIS SOFT IX/A/90	51216345

Bogart

CHIMNEY / DECORATIVE

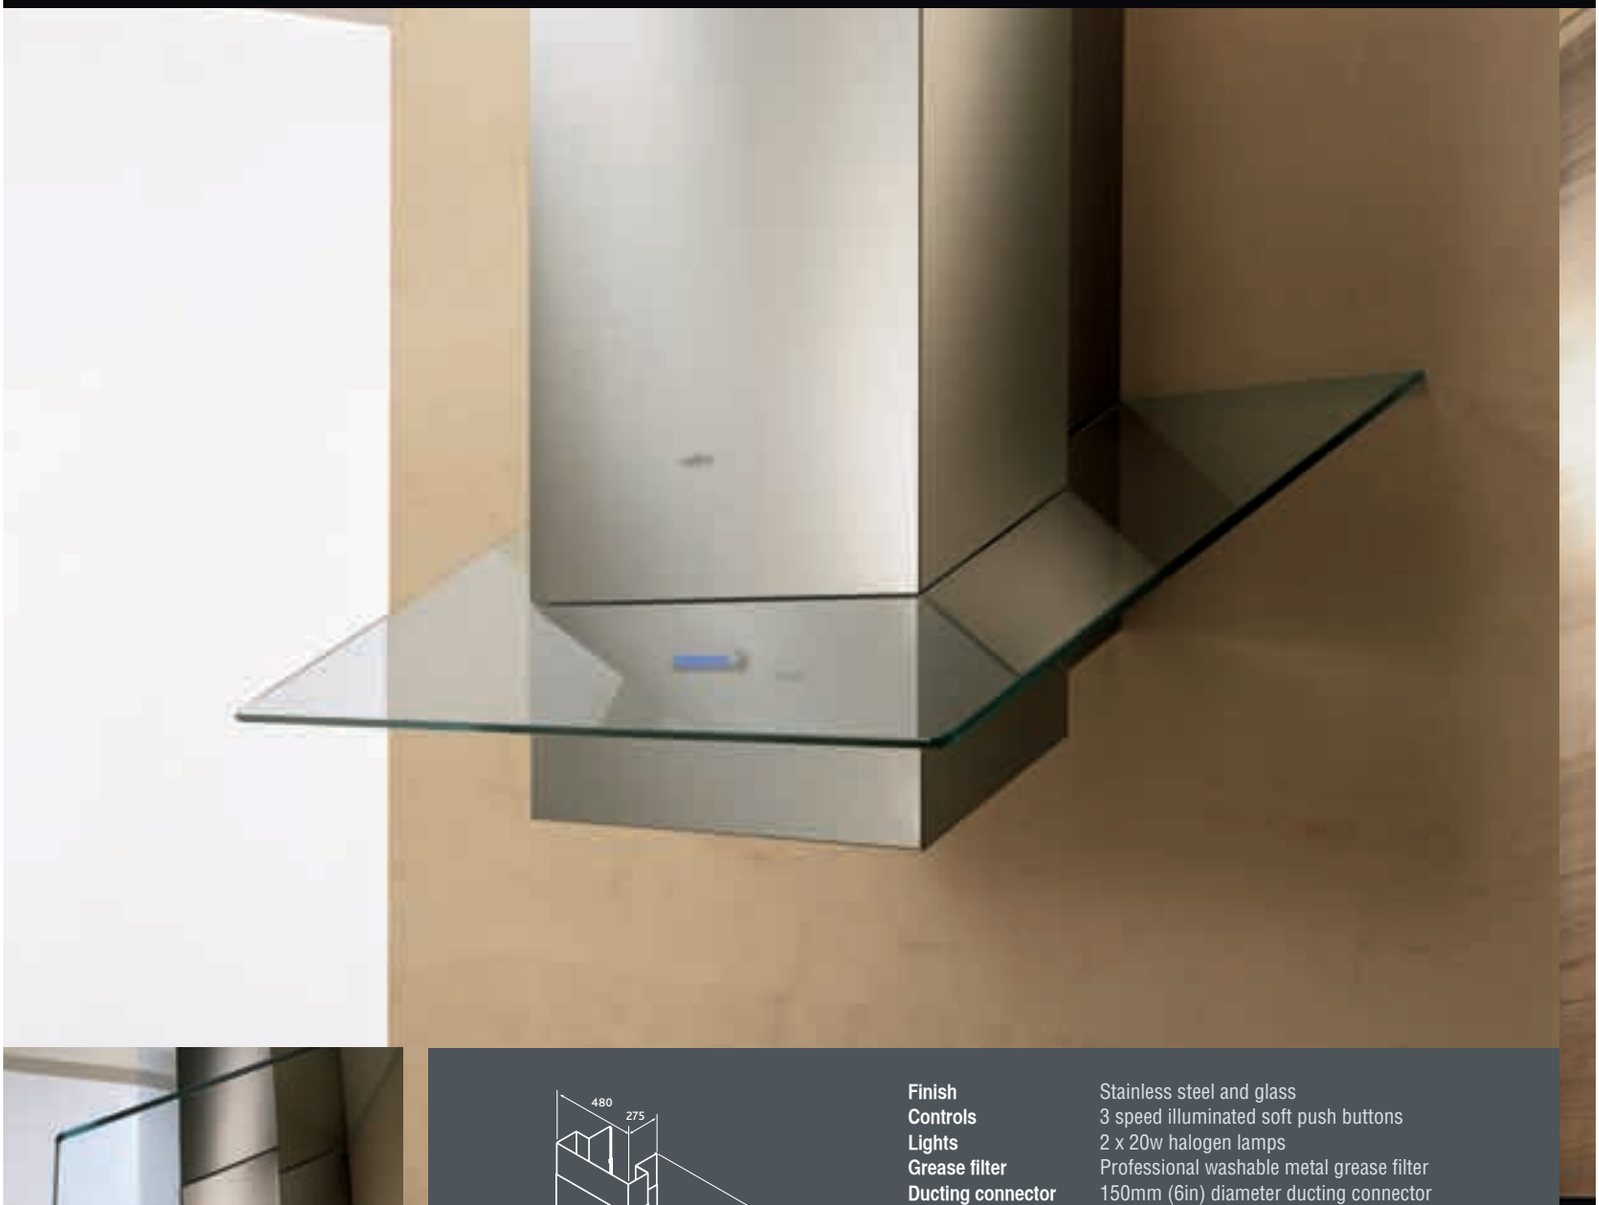



Finish	Stainless steel and glass
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	900mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	43-59 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
BOGART	BOGART SOFT IX/A/90	53016347

Optica

CHIMNEY / DECORATIVE

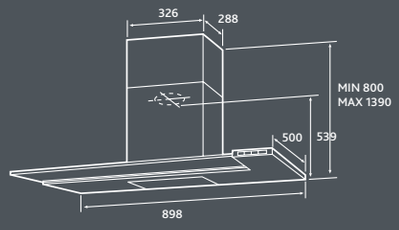

Finish	Stainless steel and glass
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	900mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	43-59 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
OPTICA	OPTICA SOFT IX/A/90	53316348

Plaza

CHIMNEY / DECORATIVE



Finish	Stainless steel with black glass centre panel
Controls	3 speed soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	800mm
Maximum airflow	850 m^3/h
IEC airflow	680 m^3/h
Noise level	43-61 dB(A)
Power consumption	290w
	Perimeter aspiration
Charcoal Filter	F00264/2S

	Description	Code
PLAZA 80	PLAZA IX/A/80	64914572

Glacier

CHIMNEY / DECORATIVE

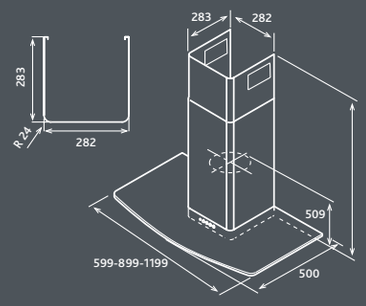

Finish	Stainless steel and glass
Controls	3 speed soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	600, 700, 800, 900 1000, 1100 or 1200mm
Maximum airflow	750 m³/h
IEC airflow	630 m³/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
	Also available with 1200 m³/h external motor
Charcoal Filter	F00262/2S

	Description	Code	
GLACIER 60	GLACIER IX/A/60	4849366/2*	
GLACIER 70	GLACIER IX/A/70	48411757/2*	
GLACIER 80	GLACIER IX/A/80	48411756/2*	
GLACIER 90	GLACIER IX/A/90	4849367/2*	
GLACIER 100	GLACIER IX/A/100	48412575/2*	
GLACIER 110	GLACIER IX/A/110	48412982/2*	
GLACIER 120	GLACIER IX/A/120	4849368/2*	** external motor versions available*

Igloo

CHIMNEY / DECORATIVE



Finish	Stainless steel and curved glass
Controls	3 speed push buttons
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	900mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	240w
	Chimney flue extension available
Charcoal Filter	F00187/1S

	Description	Code
IGLOO	IGLOO IX/F/90	3725758/1
CHIMNEY KIT	CHIMNEY EXTENTION KIT (+400mm)	KIT00775
BACKPLATE KIT	KIT 75x90 IX IGLOO	KIT 01007

Samurai

CHIMNEY / DECORATIVE



Finish	Stainless steel
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	900mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
SAMURAI	SAMURAI SOFT IX/A/90	53414556

Cube

CHIMNEY / DECORATIVE

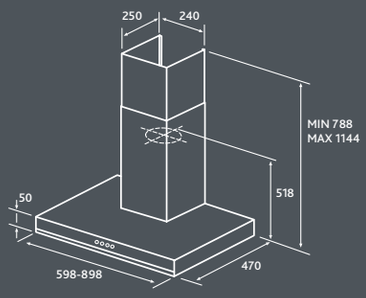

Finish	Stainless steel with glass
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	600mm or 900mm
Maximum airflow	750 m³/h
IEC airflow	630 m³/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
	Also available with 1200 m³/h external motor
Charcoal Filter	F00262/2S

	Description	Code	
CUBE 60	CUBE IX/A/60	51713693*	** external motor versions available*
CUBE 90	CUBE IX/A/90	51713694*	

Stone

CHIMNEY / DECORATIVE



Finish	Stainless steel
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamp
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	332mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
STONE	STONE IX/A/32	61412862

Stenar

CHIMNEY / DECORATIVE



Finish	Stainless steel
Controls	3 speed push buttons
Lights	2 x 20w halogen lamp
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	360mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
STENAR	STENAR IX/A/36	61212733

Focus

CHIMNEY / DECORATIVE

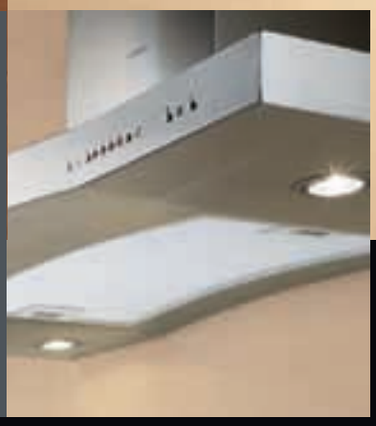

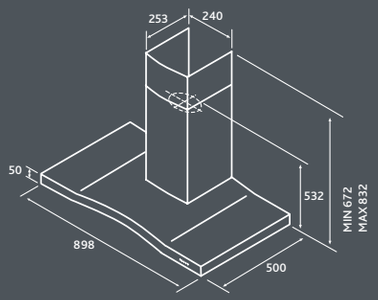

Finish	Stainless steel
Controls	3 speed electronic touch control + boost with filter saturation indicators
Lights	4 x 20w halogen lamps
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	900mm
Maximum airflow	800 m^3/h
IEC airflow	650 m^3/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
FOCUS	FOCUS TC IX/A/90	47514619

Spot

CHIMNEY / DECORATIVE



Finish	Stainless steel
Controls	3 speed push buttons
Lights	2 x 20w halogen lamps (3 x 20w halogen lamps in 1200mm version)
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	600mm, 900mm or 1200mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	220w (240w in 120cm version) 600mm & 900mm has 60mm high body 1200mm has 100mm high body
Charcoal Filter	F00262/2S

	Description	Code
SPOT 60	SPOT H6 LX IX/A/60	55911352
SPOT 90	SPOT H6 LX IX/A/90	55911346
SPOT 120	SPOT H10 LX IX/A/120	55911180
SHELF AND PLATE RACK	Shelf and plate rack (60 - 90)	Kit 00792
SHELF AND PLATE RACK	Shelf and plate rack (120)	Kit 00793

Tamaya

CHIMNEY / DECORATIVE

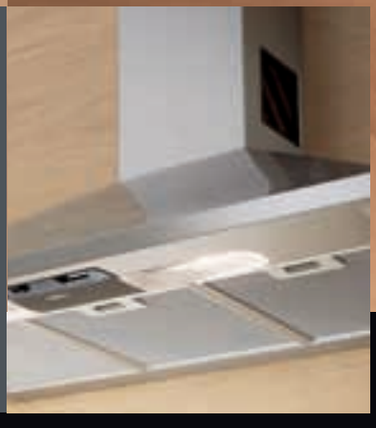



Finish	Stainless steel
Controls	3 speed slider control
Lights	2 x 40w hob lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5in) diameter ducting connector
Available size	600, 700, 900 or 1000mm in stainless steel 600 or 900mm in black or white
Maximum airflow	480m³/h
IEC airflow	430m³/h
Noise level	49-64 dB(A)
Power consumption	230w
	Short flue and chimney extension kits available for stainless steel versions only.
Charcoal Filter	F00169/2S

	Description	Code
TAMAYA 60 SS	TAMAYA IX/A/60	3876567/2
TAMAYA 60 BL	TAMAYA BL/A/60	3876565/1
TAMAYA 60 WH	TAMAYA WH/A/60	3876566/1
TAMAYA 70 SS	TAMAYA IX/A/70	3878896/1
TAMAYA 90 BL	TAMAYA BL/A/90	3876568/1
TAMAYA 90 SS	TAMAYA IX/A/90	3876570/2
TAMAYA 100 SS	TAMAYA IX/A/100	3879467/1
CHIMNEY KIT	CHIMNEY KIT	KIT007SF
CHIMNEY KIT	CHIMNEY KIT	KIT00778
CHIMNEY KIT	CHIMNEY KIT	KIT00779

Tuscan

CHIMNEY / DECORATIVE

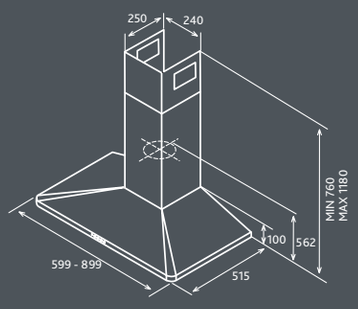

Finish	Stainless steel
Controls	3 speed soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	600mm or 900mm
Maximum airflow	750m³/h
IEC airflow	630m³/h
Noise level	46-64 dB(A)
Power consumption	220w
	Smart installation system
	Optimised aspiration system
Charcoal Filter	F00262/2S

	Description	Code
TUSCAN 60	TUSCAN IX/A/60	4769809/1
TUSCAN 90	TUSCAN IX/A/90	4769810/1

Key

CHIMNEY / DECORATIVE

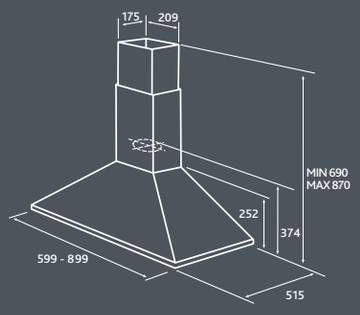

Finish	Stainless steel
Controls	3 speed push buttons
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	600mm or 900mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	220w
	Short flue and chimney extension kits available
Charcoal Filter	F00169/2S

	Description	Code
KEY 60	KEY IX/A/60	40812983
KEY 90	KEY IX/A/90	40812984
CHIMNEY KIT	CHIMNEY KIT	KIT007SF
CHIMNEY KIT	CHIMNEY KIT	KIT00778
CHIMNEY KIT	CHIMNEY KIT	KIT00779

Tonda

CHIMNEY / DECORATIVE

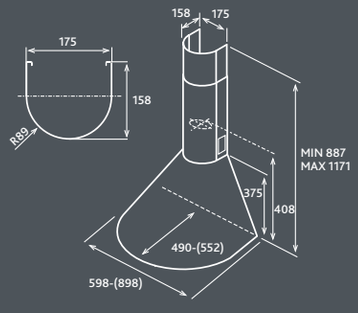

Finish	Stainless steel
Controls	3 speed slider control
Lights	2 x 40w hob lamp
Grease filter	Metal washable grease filters
Ducting connector	125mm (5in) diameter ducting connector
Available widths	600mm or 900mm
Maximum airflow	480m³/h
IEC airflow	430m³/h
Noise level	49-64 dB(A)
Power consumption	230w
Charcoal Filter	F00169/2S

	Description	Code
TONDA 60	TONDA IX/F/60	2938000
TONDA 90	TONDA IX/F/90	2937999

Aqua

CHIMNEY / DECORATIVE

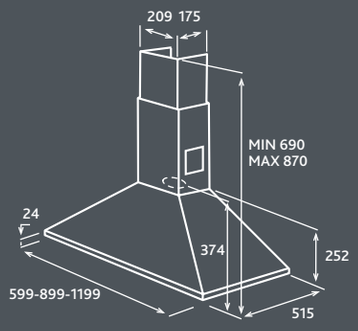

Finish	Stainless steel
Controls	3 speed slider switch
Lights	2 x 40w hob lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5in) diameter ducting connector
Available size	600mm or 900mm
Maximum airflow	480 m^3/h
IEC airflow	430 m^3/h
Noise level	49-64 dB(A)
Power consumption	230w
	Short flue and chimney extension kits available
Charcoal Filter	F00169/2S

	Description	Code
AQUA 60	AQUA IX F/60	4249920
AQUA 90	AQUA IX F/90	4249921

Hydra

CHIMNEY / DECORATIVE



Finish	Stainless steel
Controls	3 speed push buttons
Lights	4 x 20w halogen lamp
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available size	1000mm x 1000mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	260w
Charcoal Filter	F00169/2S

	Description	Code
HYDRA	HYDRA ANG IX/F/100	1608046/1

Personal

CHIMNEY / DECORATIVE



Finish	Stainless Steel + Glass
Controls	3 speed illuminated soft push buttons
Lights	2x20W halogen lamps
Grease filter	Professional washable metal grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	1000x1000 mm
Maximum airflow	750 m³/h
IEC airflow	630 m³/h
Noise level	46-64 dB(A)
Power consumption	210 w
Charcoal Filter	F00262/2S

	Description	Code
PERSONAL	PERSONAL VT IX/A/100	66414789

CLASSIC / CANOPY / INTEGRATED

47

ELIPER

48

GLIDE

48

ELIPLANE

49

ELIBLOC 9
ELIBLOC 9 REMOTE

50

ELIBLOC HT

50

ELISLIM

51

CONCORDE

51

INTEGRATA NG

Eliper

CLASSIC / CANOPY / INTEGRATED

NEW

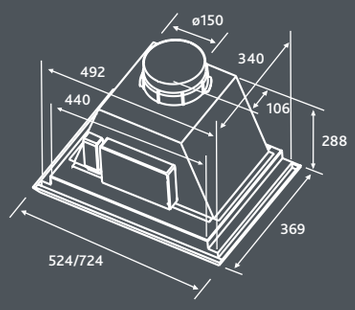

Finish	Stainless steel
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	600mm or 800mm
Maximum airflow	750 m^3/h
IEC airflow	630 m^3/h
Noise level	46-64 dB(A)
Power consumption	240w
Charcoal Filter	F00428

	Description	Code
ELIPER 60	ELIPER IX/A/60	17616385
ELIPER 80	ELIPER IX/A/80	17616384

Glide

CLASSIC / CANOPY / INTEGRATED

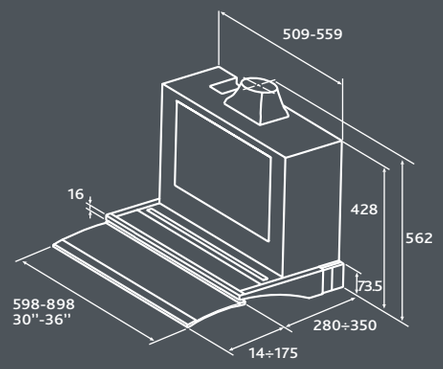

Finish	Stainless steel
Controls	3 speed illuminated soft push buttons
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filter
Ducting connector	150mm (6in) diameter ducting connector
Available widths	600mm or 900mm
Maximum airflow	800 m³/h
IEC airflow	650 m³/h
Noise level	43-61 dB(A)
Power consumption	260w
Charcoal Filter	F00171/1S

	Description	Code
GLIDE 60	GLIDE SOFT IX/A/60	52614597
GLIDE 90	GLIDE SOFT IX/A/90	52614598

Eliplane

CLASSIC / CANOPY / INTEGRATED

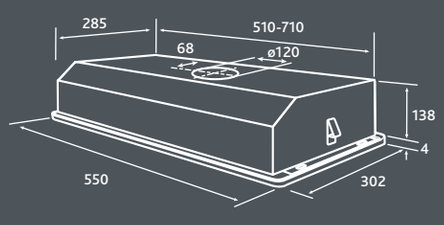

Finish	Stainless steel
Controls	Variable speed slider control
Lights	14w fluorescent lamps
Grease filter	Metal washable grease filter
Ducting connector	125mm (5in) diameter ducting connector
Available widths	550mm
Maximum airflow	480 m³/h
IEC airflow	440 m³/h
Noise level	54-69 dB(A)
Power consumption	320w
Charcoal Filter	F00171/1S

	Description	Code
ELIPLANE	ELIPLANE LX IX/F/60	1013388/3

Elibloc 9

CLASSIC / CANOPY / INTEGRATED

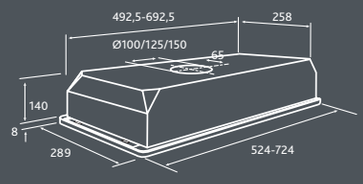

Elibloc 9	**Finish**	Grey
	Controls	3 speed slider controls
	Lights	2 x 40w hob lamps
	Grease filter	Metal washable grease filters
	Ducting connector	100mm (4in) diameter (St) 125mm (5in) diameter (Lx)
	Available widths	520mm or 720mm
	Maximum airflow	270 m³/h (St) 480 m³/h (Lx)
	IEC airflow	250 m³/h (St) 440 m³/h (Lx)
	Noise level	53-65 dB(A) (St) 54-69 dB(A) (Lx)
	Power consumption	200w (St) 320w (Lx)
	Charcoal Filter	F00189/1S

Elibloc 9 remote	**Finish**	Grey
	Controls	Variable speed slider control
	Lights	2 x 20w halogen lamps
	Grease filter	Metal washable grease filters
	Ducting connector	150mm (6in) diameter ducting connector
	Available widths	520mm or 720mm
	Maximum airflow	1200 m³/h
	IEC airflow	850 m³/h
	Noise level	31-51 dB(A)
	Power consumption	240w
	Charcoal Filter	NA

	Description	Code
ELIBLOC 9 - 60 1M GR	ELIBLOC 9 ST GR/F/60	1755555/2
ELIBLOC 9 - 60 2M GR	ELIBLOC 9 LX GR/F/60	1745563/2
ELIBLOC 9 - 80 2M GR	ELIBLOC 9 LX GR/F/80	1745564/2
ELIBLOC 9 - GME 60 GR	ELIBLOC 9 RM GR/A/60	27512771
ELIBLOC 9 - GME 80 GR	ELIBLOC 9 RM GR/A/80	27512772

Elibloc ht

CLASSIC / CANOPY / INTEGRATED

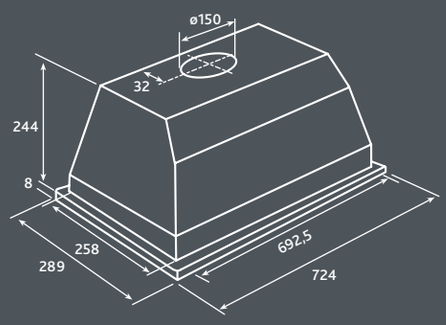

Finish	Grey
Controls	4 speed slider control
Lights	2 x 20w halogen lamps
Grease filter	Metal washable grease filters
Ducting connector	150mm (6in) diameter ducting connector
Available widths	720mm
Maximum airflow	750 m³/h
IEC airflow	630 m³/h
Noise level	46-64 dB(A)
Power consumption	240w
Charcoal Filter	F00169/2S

	Description	Code
ELIBLOC HT 80	ELIBLOC HT GR/A/80	17614580

Elislim

CLASSIC / CANOPY / INTEGRATED

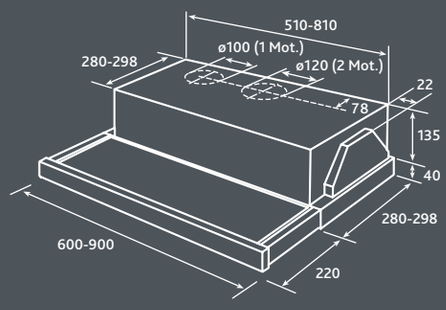

Finish	White with stainless steel front panel
Controls	3 speed slider control
Lights	2 x 40w hob lamps
Grease filter	Metal washable grease filters
Ducting connector	125mm (5in) diameter ducting connector
Available widths	600mm or 900mm
Maximum airflow	480 m³/h
IEC airflow	430 m³/h
Noise level	46-64 dB(A)
Power consumption	240w
Charcoal Filter	F00208/1S (2 required)

	Description	Code
ELISLIM 60 2M	ELISLIM LX WH/IX/A/60	24013711
ELISLIM 90 2M	ELISLIM LX WH/IX/A/90	24013712

Concorde

CLASSIC / CANOPY / INTEGRATED

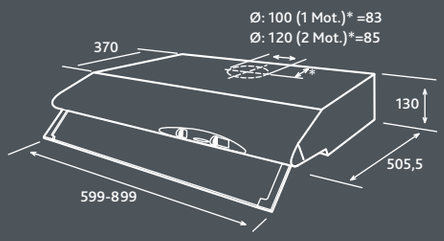

Finish	Black, white or stainless steel
Controls	3 speed slider control
Lights	1x40w hob lamp (St) 2x40 hob lamp (Lx)
Grease filter	Disposable fibre grease filter (St) Metal washable grease filter (Lx)
Ducting connector	100mm (4in) dia (St) 125mm (5in) dia (Lx)
Available widths	600mm (St) 600mm, 900mm (Lx)
Maximum airflow	250 m³/h (St) 400 m³/h (Lx)
IEC airflow	220 m³/h (St) 360 m³/h (Lx)
Noise level	52-67dBA (St) 55-69dBA (Lx)
Power consumption	160w (St) 320w (Lx)
Charcoal Filter	F00173/1S (St) / F00159/1S (Lx)

	Description	Code
CONCORDE 60 1M WH	CONCORDE ST WH/F/60	1254913/2
CONCORDE 60 1M BL	CONCORDE ST BL/F/60	1254917/2
CONCORDE 60 1M SS	CONCORDE ST IX/F/60	1255039/2
CONCORDE 60 2M WH	CONCORDE LX WH/F/60	1275533/3
CONCORDE 60 2M BL	CONCORDE LX BL/F/60	1275534/3
CONCORDE 60 2M SS	CONCORDE LX IX/F/60	1275532/3
CONCORDE 90 2M WH	CONCORDE LX WH/F/90	12710808/1
CONCORDE 90 2M BL	CONCORDE LX BL/F/90	12710809/1
CONCORDE 90 2M SS	CONCORDE LX IX/F/90	1277303/2

Integrata NG

CLASSIC / CANOPY / INTEGRATED

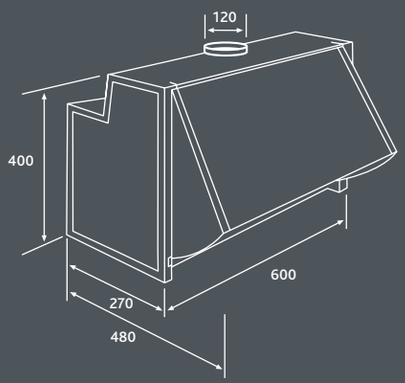

Finish	Grey
Controls	3 speed slider control
Lights	2 x 40w hob lamps
Grease filter	Metal washable grease filters
Ducting connector	100mm (4”) diameter (Std) 125mm (5”) diameter (Lux)
Available widths	600mm
Maximum airflow	300m³/h (Std), 540m³/h (Lux)
IEC airflow	270m³/h (Std), 480m³/h (Lux)
Noise level	50-62 dB(A) (Std), 55-68 dB(A) (Lux)
Power consumption	240w
Charcoal Filter	F00366/1S (Lux 2 required)

	Description	Code
INTEGRATA NG STD	INTEGRATA NG STD GR/F/60	5414464
INTEGRATA NG LUX	INTEGRATA NG LUX GR/F/60	5414465

Technology

EDS3

Lose yourself in the music you love. Listen to the happy bubbling chatter of your kids telling you about their day at school. Luxuriate in the subtle vibrations of the world as it turns around you.

Exceptionally silent, almost imperceptible at low speeds, EDS3 is Elica's latest innovation to enrich your life, providing the maximum possible reduction in noise emission.

Reducing noise pollution by more than 35% compared to traditional cooker hoods, Elica's innovative EDS3 system, working at an ariflow of 500 m3/h, provide a noise level of less than 45 db/a.

MAGIC WAND CONTROL

Our latest cutting edge technology "magically" enclosed in a slender steel stem. The gentlest of touches to the upper section controls the extraction speed, another to the lower and the lighting dims or rises to your command.
An illuminated ring on the stem, changes colour with each touch to keep you informed of the current extraction speed.

PERIMETER ASPIRATION

Elica now designs the air itself. Precision engineering directs the airflow across the entire surface of the hood, thus increasing the effective extraction area of the hood.
This Elica developed system reduces energy consumption and noise and has lead to the development of some of our most striking hood designs.

EXTERNAL MOTORS

Many Elica models offer an external motor version.
Here the motor and fan are either located in a loft space or on an outside wall. The result, superior performance with reduced extractor sound.

OPTIMISED ASPIRATION SYSTEM

Elica hoods treat fumes, odour and vapour.
Our Optimised Aspiration System ensures the optimum balance between effectiveness, efficiency and quietness.

TESTING TO THE MOST VIGOROUS STANDARDS

The stated performance levels are measured according to the strictest and most up-todate technical standards (Airflow/Pressare Standard IEC61591). The values (expressed in m3/h) are reported in the features list of each product and are designated as follows:

- IEC Airflow: test carried out with a standard pipe applied to the product.
- Maximum Airflow (Free Outlet): test carried out directly at the outlet point of the hood.
- Noise level: standards IEC60704-1; IEC60704-2-13.
- Power consumption: power of motor and lighting.

Choosing your Elica Cooker Hood.

DESIGN

Modern kitchens are becoming more of a social centre to the home and are thus increasingly driven by design. Not only must your kitchen be a practical place where food can be prepared and families or friends gather, but now it must reflect your personal style, taste and character. This is especially true in your choice of cooker hood; not only must it keep your kitchen clear of steam, smoke and odours but it must also make a strong design statement in your kitchen. Design is of course is a very personal thing, but no other cooker hood manufacturer offers more choice of styles or further pushes the boundaries of cooker hood design than Elica.

SIZE

Most hoods are made to a size to suit the popular widths of hobs or cookers so you may wish to match the canopy width of your hood to your intended hob size. However, many modern designers also double up smaller hoods to make a very strong design statement.

CEILING HEIGHT

It is very important for you to measure the height of your ceiling to check if a hood will fit. Remember to allow for the height of the Units plus the thickness of the work top and then add a minimum of 650mm above an electrical hob or a minimum of 700mm above a gas hob. The remaining distance to the ceiling is where you can put your hood. There is no such thing as a standard ceiling height in the UK, so it is very important to measure up before you buy.

MINIMUM INSTALLATION HEIGHTS

Minimum installation heights are generally 650mm above electric hobs and 700mm above gas hobs. The height above gas is recommended for hobs of 11.3kw or less. For higher rated hobs please seek advice.
Our 'Plaza' cooker hood can be as low as 400mm above electric hobs and our 'Glide' decorative built in hoods can be 430mm above electric hobs.

EXTRACTION POWER

The hood must be powerful enough to change the air in the kitchen ideally 12 times per hour, but at least 8. A good formula to follow in order to help you calculate the power that you need is to multiply the volume of your room by 10 (Volume = length x width x height). An average room is approximately 25m3; therefore the extraction rate required for the average room is 250m3/h. All Elica cooker hoods have maximum airflow figures in excess of 250m3/h, some as much as 1200m3/h.

DUCTING OR RECYCLING

Will your choice be ducted to the outside of the house or a recycling model? If ducted out, the ducting needs to be the correct size as recommended in the hoods technical specification. A cooker hood installed with the correct ducting will extract virtually all the steam, cooking odours and airborne grease from the kitchen. If however, it's impractical to install ducting in your home, then charcoal filters can be used to clean and re-circulate fresher air around the room.
Whichever hood is chosen, Elica adopt only the latest European standards when measuring the efficiency of their products. That's why Elica cooker hoods are recognised around the world for their unsurpassed beauty and performance.

CHIMNEY KITS

To accommodate different ceiling heights in different kitchen installations we offer stainless steel chimney extension kits for some models.

CHARCOAL FILTERS

The Charcoal filter is the essential component for using your Elica hood in recycling mode. Each hood requires a specific charcoal filter but selected hoods offer the choice of a standard filter, which offers air cleaning and odour removal for up to 3 months, or a long life filter which can last for up to 3 years. Long life filters are available for selected hoods and are made of technologically advanced activated charcoal. These waste saving filters can be taken out of the hood, washed in a dish washer, dried in a low oven and then placed back in the hood.

YOUR GUARANTEE

Elica is totally committed to service, quality and innovation and we are proud to supply the world's finest cooker hoods to our customers. Elica cooker hoods are designed for use in domestic kitchens and are guaranteed for 2 years against faulty material or workmanship, protecting your hood against mechanical or electrical failure.

INSTALLATION

We recommend that your Elica cooker hood should be installed by a qualified engineer. If the hood is to be ducted to the outside, it is important that the correct size of ducting is used.

For information on an extensive range of ducting, filters and accessories please refer to the DR Cooker Hoods Essentials brochure.

Note

Elica
Via Dante 288
60044 Fabriano AN Italy
T +39 0732 6101
F +39 0732 610249
info@elica.com
www.elica.com

D R Cooker Hoods Ltd
2 Alpha Road Aldershot
Hampshire GU12 4RG
T 01252 351111
F 01252 311608
sales@drcookerhoods.co.uk
www.elica.co.uk

Art Direction: Design Team Elica
Graphic Design: tonidigrigio.it
MC00841

Whilst every effort is made to ensure that the information contained in this brochure is correct at time of going to press, Elica cannot be held responsible for any errors or omissions.

Specification may differ from those described or illustrated and Elica reserve the right to change specification without prior notice.

Due to printing limitations, colours and finishes re indicative only. If particular features, colours or sizes are important to you, please check with your Elica retailer prior to purchasing.